
Pivots

Concealed




Sobinco
OPENS YOUR LIFE

DESCRIPTION

The pivot series n° 2500 is fully **concealed**, resulting in greatly **improved aesthetics**.

CHARACTERISTICS

- This pivot ensures a **smooth and quiet operation** because of the special construction.
- The pivots are **suitable for horizontal pivoting and vertical pivoting windows**.
- An integral adjustable friction mechanism is active from 0° through to 180° opening angle. The friction is adjusted by 2 adjustment screws using a hexagonal spanner of 4 mm.
- The pivot is not provided with an integral restrictor. A restriction of the opening angle is obtained by a separate window stay.
- Always supplied in pairs, there is always a left hand and a right hand pivot.

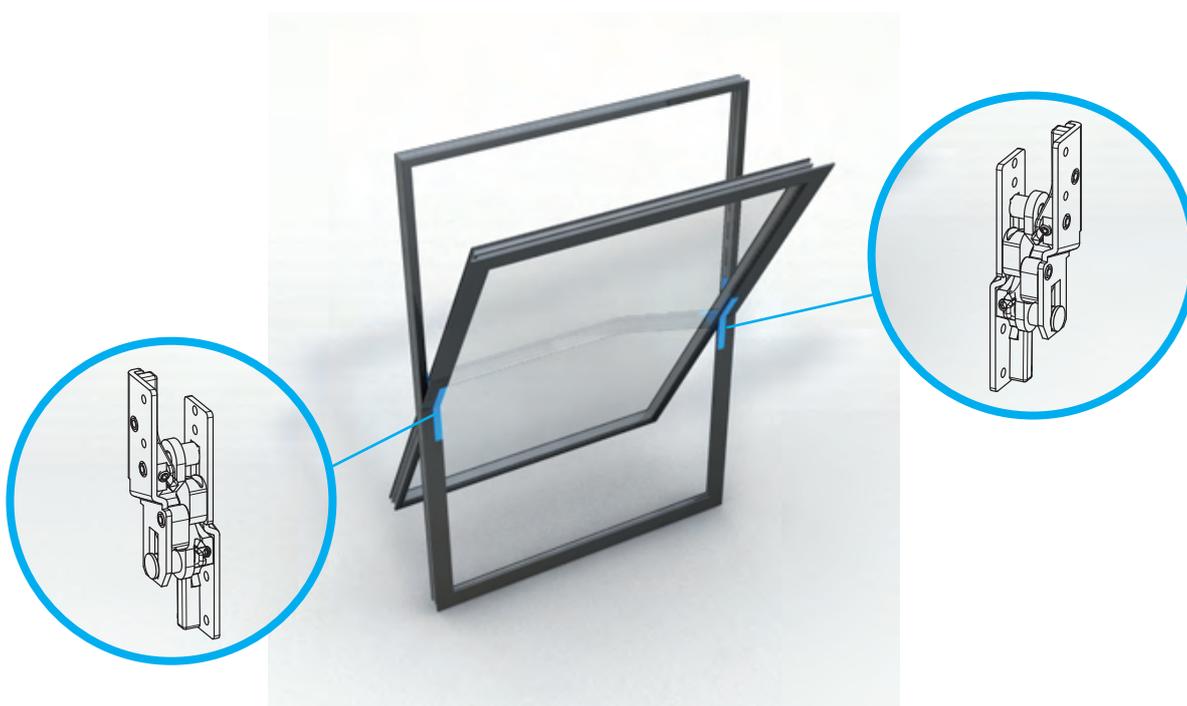

SIZE RANGE


• Horizontal pivoting window:

- vent width: max. 2400 mm
- vent height: max. 2000 mm
- vent weight: max. 180 kg



• Vertical pivoting window:

- vent width: max. 2000 mm
- vent height: max. 2400 mm
- vent weight: max. 120 kg



- The minimum vent height (for horizontal pivoting windows) or the minimum vent width (for vertical pivoting windows) is profile related and depends on the perimeter locking set used. The maximum vent dimensions and vent weights also depend on the stability of the profiles.



Closed position

180 ° opening