

---

# Chrono Invision Go

Concealed hinge for standard applications

---



**Sobinco**  
OPENS YOUR LIFE

## DESCRIPTION

The Chrono Invision Go hinge for aluminium windows is invisible when the window is closed. Chrono Invision Go is available to suit profiles with a frame groove of 14/18 mm or a frame groove of 10/14 mm. The Chrono Invision Go hinge is compatible with Chrono Standard, Plus and Safe fittings.

## CHARACTERISTICS

- Vent weights up to 90 kg (RAL GZ607/3).
  - Vent width (Fb) up to 1300 mm.
  - Vent height (Fh) up to 2800 mm.
  - Ratio of Fb / Fh = max. 1.2.
- Vent weights up to 130 kg if Fb = 670-1200 mm and Fh = 1800-2800 mm (window stay is required!).
- Anti-lift security: bottom hinge security device in tilt position.
- All parts are made of non-corroding materials.
- Chrono Invision Go Safe is certified with 2 SKG stars. 
- Chrono Invision Go Standard is certified according to RAL GZ 607/3 and QM 328 (EN 13126-8 and EN 1191).
- Turning circle with small swing-out:
  - for smaller profiles: no collision with window frame.
  - maximum opening angle of 100°.
- Optional window stay:
  - restricted opening at 90°.
  - arm is easy to install via click system.
  - for ventilation vents: available with restricted opening at 60° and at 90°.



## ADJUSTMENTS


- **Bottom hinge:**
  - Continuous horizontal and vertical adjustment range: -1.5 mm/+1.5 mm.
  - Adjustable without releasing fixing screws and without removing the vent.
- **Top hinge and link arm:**
  - Continuous horizontal adjustment range: +2 mm/-4 mm for turn-tilt and tilt-turn windows.
  - Continuous horizontal adjustment range: +3 mm/-3 mm for side hung open windows.
  - Gasket pressure adjustment:  $\pm 0.8$  mm.

## ADVANTAGES

- Aesthetic solution.
- Quick assembly.
- Large adjustment range.
- High burglar-resistance.
- Increased wind and water resistance.



# Extra anti-slam shut device

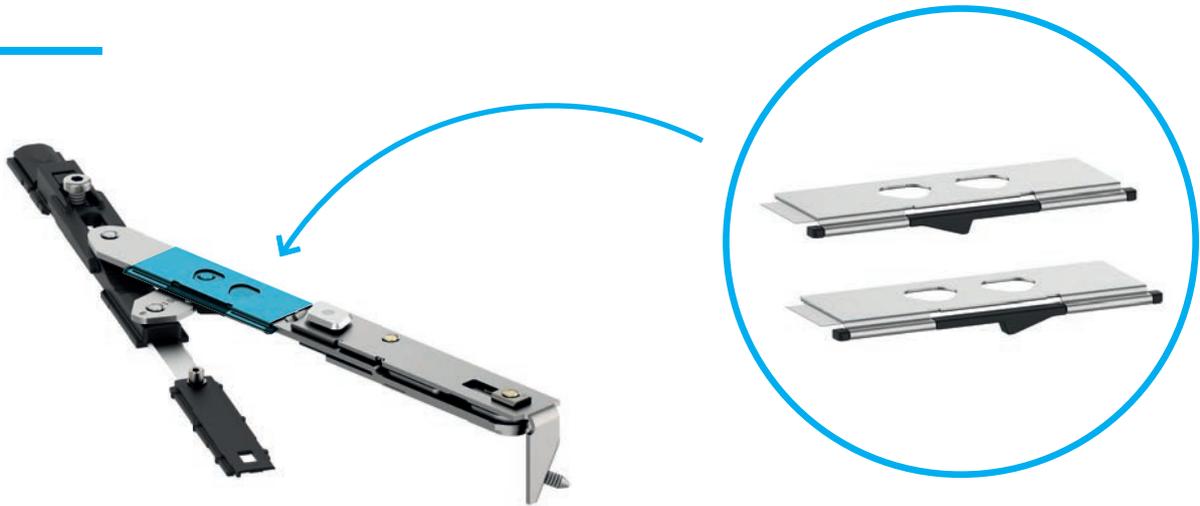


## DESCRIPTION

The extra anti-slam shut device - **which can be installed afterwards** - is a component that generates a higher **tilt force**, thus **preventing the vent from closing unintentionally from its tilt position**, without losing sight of user convenience. The device can be quickly and easily installed on the long part of the smallest link arm. The additional device is available as a left-hand and a right-hand variant.

## CHARACTERISTICS

- For a vent width up to 670 mm and a vent height of 1800 to 2800 mm: **required**.
- For a vent width up to 670 mm and a vent height up to 1800 mm: **optional**.
- Made of non-corroding materials.
- High corrosion resistance class 4 - EN1670.

## SIZE RANGE



■ Required.

▨ Optional.  
Beware of the high operating force. Can be > 100N.

## ADVANTAGES

- Large size range.
- Can be installed afterwards.
- Easy installation (double sided tape).



**We are Sobinco. We get things done.** We specialise in the development and production of innovative locking systems and components for the aluminium windows and doors industry.

At Sobinco **the entire production process takes place under one roof.** In this way we are able to manage and control the value creation chain from start to finish. This gives us **great flexibility** and allows us **to attain sustainable results over the short term.**

**Innovation is our passion.** Our creativity, expertise and craftsmanship provide a guarantee of added value which translates into **high-quality products, easy assembly, modularity, sustainability and aesthetic comfort.**

Driven by this passion, **our team** at all times endeavours to **improve our current products and develop new ones.** To this end, we listen to the market and to our customers.

We use **high-quality materials** for our product development. These products are **exhaustively tested in line with the strictest of guidelines and quality requirements.** Every product must satisfy these as a minimum and their ratings often exceed the required standards.

We have a **strong customer focus.** Not only in the development of our products, but also in our after-sales support, during the installation process and even long afterwards.

Sobinco is a financially viable and high-tech environment where our specialists can focus on their strengths. With more than 60 years in the business, you can rest assured that we are a reliable partner, ready to seize the opportunity. Nevertheless, we remain approachable. In short, **a family atmosphere, where there is mutual respect** for management, customers, partners and employees.

**We are Sobinco. We get things done. We listen. We think in terms of opportunities. We are not afraid to roll up our sleeves.**

VAN PARYS FAMILY

PEOPLE

COMPLETE SERVICE

VERTICAL INTEGRATION

Listen. Think. Do.

SUSTAINABLE GROWTH

INNOVATION

TOP QUALITY

FITTINGS FOR ALUMINIUM WINDOWS & DOORS

Waregemstraat 5 - 9870 Zulte - Belgium

T +32 9 388 88 81 - F +32 9 388 88 21

commercial@sobinco.com

[www.sobinco.com](http://www.sobinco.com)

**Sobinco**  
OPENS YOUR LIFE